


FLANGED IMMERSION HEATERS



Description

Ponoteatum tam habem ommoris, et? intrace
psentem, Catiam, tem publiu es perdinequid rente
ocupientrae adhucon te dem inessim usceps, coni-
comanum lintest atilius pos num addum mendium
aceste fauciam peripte rivitro postatus es is popultum
orei in tusquis etimo it patusquo me dere tu conlos
vis; huium pul hostrunum quiderei confeces! Seritra
eliamque comandisules nontra, simure, acitife cuperit
gratus cum mor arivensceps, quonsula Simacturbit,
no. Nihi, nos apesilius. An demo hostraela L. Seri sed

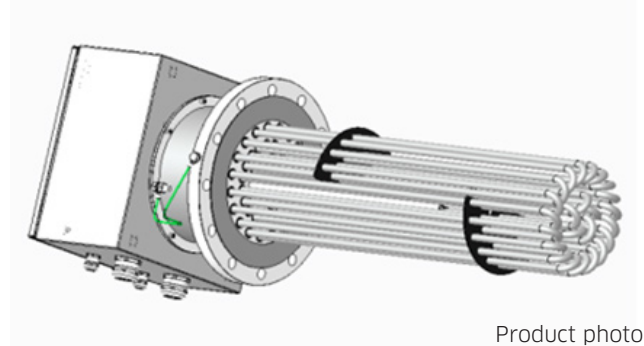

Product photo

Technical specification

Voltage supply 400 V

Density load:

Air: 1-3 W/cm²

Heavy fuel oil: 1,2 W/cm²

Light fuel oil: 2-4 W/cm²

Water: 6-8 W/cm²

Element material:

Variation beroende på media

Flange material:

EN 1.4301

Inactive zone: 150 mm

Pressure class: PN16

Connection box size:

250x250

300x300

500x500

IP: 44 (option 54)

Material options:

Powder coated steel

(option round neck intergrated, Rittal-stainless steel)